


SOFTSLAM® INSTALLATION GUIDES

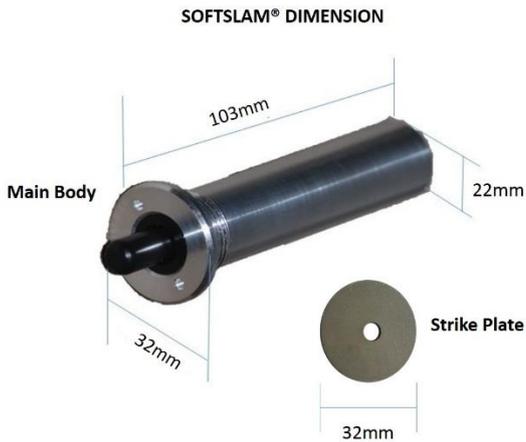


Required Tools for Installation

1. 22mm Auger or Spade Bit
2. 32mm Spade bit
3. Long Nose Pliers
4. Adhesive

Step 1 Analyze The Door Gap

If your door has a standard 3 mm or wider gap, you are ready for STEP 2. Doors comes from the manufacturer with a 3mm door gap allowing for paint which will give a 2mm gap finish. Use the 32mm spade bit to allow the 1mm paint allowance. Just take the paint off or allow the 1mm. SoftSlam's flange is 3mm thickness.

If your door has a narrow gap, using your 32 mil spade bit, carefully create a place to countersink the flange of the SoftSlam at the desired location. Door gaps can be 0 to 6 mm or more. See diagram on the right.

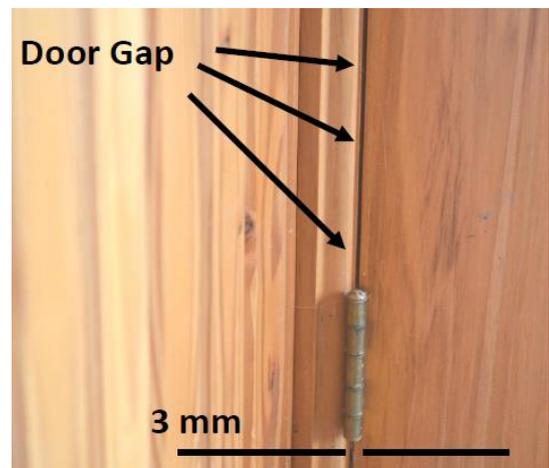

Step 2: Drilling The 22mm Hole

1. Mark the center point of the door 30mm above the bottom hinge where you want your SoftSlam.
2. Using your 22mm bit, drill at least 105mm deep at the center point. Insert the SoftSlam into the hole to verify fit. If it is too tight, use your drill to ease it slightly.

If your door has a narrow gap, using your 32mm spade bit, carefully create a place to countersink the flange of the SoftSlam at the desired location. Door gaps can be 0 to 6 mm or more. See diagram on the right.

Note: if the gap is not large enough and this step is skipped, you can cause your door to bind on closing.



SOFTSLAM® INSTALLATION GUIDES

Step 3: Screw the SoftSlam Firmly

Use your needle nose or circlip pliers to screw the SoftSlam in firmly till the Flange is seated for the gap required.

Take your time and you can use a touch of soap or candle to make just like you do with a screw if the screwing is tight or ease a little more with the drill bit.



Step 4: Install the Strike Plate

1. Gently close your door. When you open the door again, there will be an indent from the SoftSlam on the opposite surface. This is the center point of the strike plate. This gives you an idea where the strike plate will be. Centre the Strike plate to the door or jamb.
2. Using the 32mm bit, carefully create a counter sink to set the strike plate in. For a clean finish, you will want the strike plate to sit flush with the surface.
3. Apply adhesive to the back side of the strike plate.
4. Insert strike plate into counter sink.
5. Close door and leave undisturbed until glue sets per the glue manufacturer's recommendations.



Remember, your SoftSlam has a reset time after every activation. Do not catch a finger in the door while playing with your anti-slamming device. Watch for the reset. Heavy duty has a slightly longer reset than light duty. Reset should not be more than 30 seconds. Contact Slammer-Anti Ltd if you think that your SoftSlam is not working. Send a video or return your SoftSlam, in good condition, for a full refund.

For Support & Assistance:

Inspiriland

34 Westwood Crescent

Singapore 648758

Email: info@inspiriland.com

Tel: +65 9699 1913

For Return:

Inspiriland (Return)

34 Westwood Crescent

Singapore 648758

(Please include a copy of the receipt)

SOFTSLAM®

by

SLAMMER

QUIET AND SAFE DOOR SOLUTIONS
NZ DESIGNED • NZ MADE • 100% GUARANTEED

