


Cardea Window and Door Restrictor Fitting Instructions

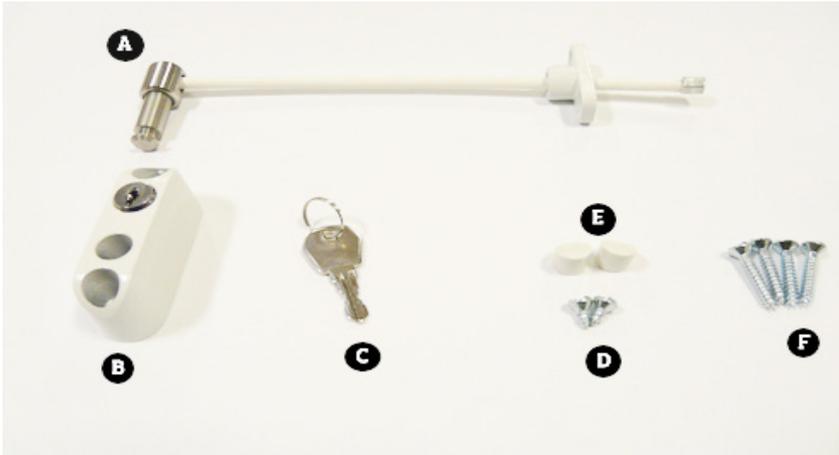

Parts List

- A 1 x Restrictor Unit
- B 1 x Lock Unit
- C 1 x Key
- D 2 x alternative fixing screws
- E 2 x Plastic Covers
- F 4 x 1" Self Tapping Screws

Tools Required

Flat-head Screwdriver

Pencil

Please Note: The standard length of the Cardea Window Restrictor cable is 200mm, it provides 100 - 150mm of opening depending on the installation.

The Cardea Window Restrictor can be fitted either horizontally or vertically.

The window should be in the closed position during installation.

IMPORTANT - We recommend that the fixing points for this lock are fitted in a position that allows approximately 100mm opening.



Step 1

Position the restrictor unit (A) in the centre of the opening window frame (both horizontally and vertically).

With a pencil, mark the frame where you will fix the device.



Step 2

Repeat Step 1 on the fixed window frame, marking the holes for the lock unit (B) ensuring that the lock unit is installed adjacent to the restrictor unit.



Step 3

For ease of installation we would recommend you pre-drill pilot holes with a 3mm drill bit (although this is not essential).



Step 4

Position in turn both the lock unit and restrictor and secure with screws provided.



Step 5

Clip plastic covers in to position over the metal parts.



How to Operate

To operate the Cardea Window Restrictor, ensure the restrictor is inserted into the lock unit and turn the key to the locked position.

Use the key to lock and unlock as needed, we recommend you keep the key in a safe place separate to the window.

Caring for your Cardea Window Restrictor

1. Clean your window restrictor regularly with a damp cloth.
2. On a regular basis ensure that the key operates and lubricate as needed.

IMPORTANT

Fitting of the Cardea Window Restrictor is possible to most window and door materials and styles, and can be fixed in many ways. Please note the screws are tamper proof and once fitted cannot be removed. It is important to assess the type of material you are fitting to i.e metal, uPVC, timber and aluminium as well as window or door configuration i.e. top hung, side hung, casement, pivot, tilt/turn, sliding sash, etc. to ensure the best fixing.

The Cardea Window Restrictor should not be fitted to areas of corroding steel, decaying timber or any units that are in disrepair.